# CAT-HDX11MT/A1

HDMI OVER SINGLE CAT-5 EXTENDER WITH LOCAL MONITOR OUT, KEYBOARD, MOUSE, IR AND RS-232 (TRANSMITTER)





## DESCRIPTION

#### **Home Application**


Enhance your home entertainment center and extend HDMI devices throughout your home.

#### **Data Broadcasting**

Data such as news, stock prices, sports results, and flight information can be broadcast in real time to various monitors.

## FEATURES

- HDMI Version 1.3b Compliance
- HDCP Compliance
- With Local Monitor Out, Keyboard (PS-2) and Mouse (PS-2)
- Extend Full HD (1900x1200) or1080p HDMI Up to 100meter over a Single Cat-5e Cable
- With IR and or RS-232 Control pass through

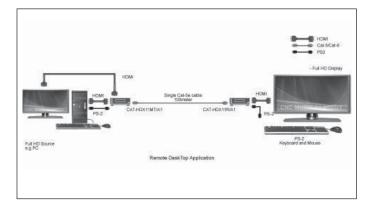

## TYPICAL APPLICATIONS

Home Application; HD Presentation; Data Broadcasting; Learning and Training

## TECHNICAL SPECIFICATION

HDMI COMPLIANCE: 1080p - 60HZ 1.3b HDCP COMPLIANCE: Yes VIDEO BANDWIDTH: 1080p 60HZ 225 MHz VIDEO SUPPORT: 480i/480p/720p/1080i/1080p60 up to 36-bit color AUDIO SUPPORT: Surround sound (up to 7.1ch) or stereo digital audio HDMI over UTP [24bit]: Full HD (1080p) - 100m (330ft) TRANSMISSION RANGE: HD 1080p - 100m / CAT-5e INPUT TMDS SIGNAL: 1.3 Volts [peak-to-peak] INPUT DDC SIGNAL: 5 volts [peak-to-peak, TTL] **ESD PROTECTION:** [1] Human body model— ±15kV [air-gap discharge] & ±15kV [contact discharge] [2] Core chipset -±15kV PCB STACK-UP: 6-layer board [impedance controldifferent  $100\Omega$ ; single  $50\Omega$ ] Transmitter INPUT: 1 x HDMI 1 x Keyboard (PS-2) 1 x Mouse (PS-2) OUTPUT: 1 x HDMI (monitor out) 1 x IR 1 x RJ45 COMMUNICATION I/O: 1 x RS-232 HDMI SOURCE CONTROL: Controllable via IR pass-through from

## \* Receiver used: CAT-HDX11R/A1

\* Specifications are subject to change without notice.

IR receiver at RX to IR blaster at TX

