


newline

OPS PC



Compatible con todas las pantallas de Newline

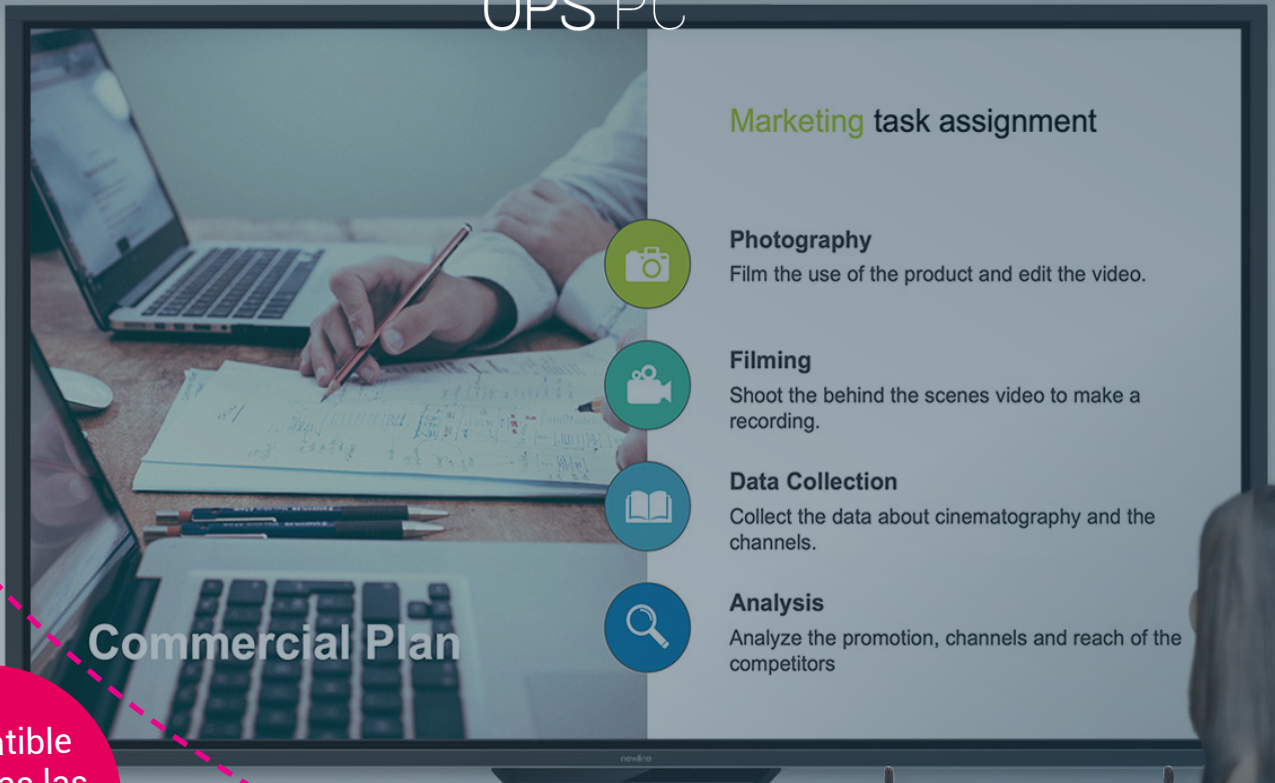


Powered by Intel



Compatible con HDMI 2.0



USB-C



Memoria doble canal



OneKey Recovery



Compatible con TPM 2.0

EL PODER DE WINDOWS PERFECTAMENTE INTEGRADO

Los OPS PC de Newline son ordenadores para las pantallas Newline que se integran perfectamente en la ranura de la parte trasera del panel. Cuando enciendes la pantalla Newline, el OPS PC se enciende automáticamente también. Sin cables visibles, no es necesario conectar otro dispositivo Windows. La gama de OPS PC de Newline incluye diferentes especificaciones. Todos los modelos tienen un modo de recuperación para restaurar el PC rápidamente en caso de fallo del sistema. Los OPS PC de Newline están equipados con Intel y son compatibles con 4K/UHD a 60 Hz para una calidad de imagen brillante. Son el componente ideal para cualquier solución de Newline.

OPS PC

Model	WB5A820W	WB5A820J	WB7A120J
Procesador	Intel® Whiskey lake-U	Intel® Whiskey lake-U	Intel® Whiskey lake-U
SOC	Intel® Core™ i5-10210U	Intel® Core™ i5-10210U	Intel® Core™ i7-10510U
Memoria	2 x 4 GB DDR4	2 x 4 GB DDR4	2 x 8 GB DDR4
Rendimiento	6 M Cache, up to 4,20 GHz	6 M Cache, up to 4,20 GHz	8 M Cache, up to 4,90 GHz
Almacenamiento	256 GB SSD	256 GB SSD	256 GB SSD
Gráficos	Intel® UHD Graphics	Intel® UHD Graphics	Intel® UHD Graphics
Wireless	Intel AC3165/8265 (2.4G/5G/BT 4.2)	Intel AC3165/8265 (2.4G/5G/BT 4.2)	Intel AC3165/8265 (2.4G/5G/BT 4.2)
WIFI/BT	802.11ac/BT4.2	802.11ac/BT4.2	802.11ac/BT4.2
Red	Integrated 10/100/1000 M Adaption	Integrated 10/100/1000 M Adaption	Integrated 10/100/1000 M Adaption
Lan	Intel 1000M	Intel 1000M	Intel 1000M
Audio	Realtek ALC662 HD Audio IC	Realtek ALC662 HD Audio IC	Realtek ALC662 HD Audio IC
Conexiones frontales	USB-A 3.0 x 2 USB-A 2.0 x 2 RJ45 10/100/1000 M x 1 HDMI 1.4 out (4K@30 Hz) x 1 Jack 3,5 mm Line out x 1 Jack 3,5 mm Mic in x 1 WIFI/BT ANT x 2 Power button x 1 Power LED x 1 SSD LED x 1 Kensington lock slot x 1 USB-C x 1	USB-A 3.0 x 2 USB-A 2.0 x 2 RJ45 10/100/1000 M x 1 HDMI 1.4 out (4K@30 Hz) x 1 Jack 3,5 mm Line out x 1 Jack 3,5 mm Mic in x 1 WIFI/BT ANT x 2 Power button x 1 Power LED x 1 SSD LED x 1 Kensington lock slot x 1 USB-C x 1	USB-A 3.0 x 2 USB-A 2.0 x 2 RJ45 10/100/1000 M x 1 HDMI 1.4 out (4K@30 Hz) x 1 Jack 3,5 mm Line out x 1 Jack 3,5 mm Mic in x 1 WIFI/BT ANT x 2 Power button x 1 Power LED x 1 SSD LED x 1 Kensington lock slot x 1 USB-C x 1
JAE 80-Pin	HDMI 2.0 (4K@60 Hz)	HDMI 2.0 (4K@60 Hz)	HDMI 2.0 (4K@60 Hz)
Alimentación	12-19 V DC IN	12-19 V DC IN	12-19 V DC IN
TPM	TPM 2.0	TPM 2.0	TPM 2.0
Watchdog	Support	Support	Support
Material	Metal	Metal	Metal
Dimensiones	180 x 119 x 30 mm	180 x 119 x 30 mm	180 x 119 x 30 mm
Temperatura	Operating 5°C~45°C Storage -10°C~50°C	Operating 5°C~45°C Storage -10°C~50°C	Operating 5°C~45°C Storage -10°C~50°C
Humedad Relativa	5%~95% (non-condensing)	5%~95% (non-condensing)	5%~95% (non-condensing)
Peso neto	1 Kg	1 Kg	1 Kg
Windows	Windows 10 Pro Preinstalled (not activated)	Windows 10 Pro License included	Windows 10 Pro License included

newline

HEAD OFFICE EMEA

Ronda de Poniente, 16,
Bajo E, 28760, Tres Cantos,
Madrid, Spain
TEL: +34 910528834

BRANCH OFFICE POLAND

Aleje Jerozolimskie 200,
pokój 322, 02-486,
Warszawa, Poland
TEL: +48 533379973

BRANCH OFFICE GERMANY

Am Münster 36,
37154 Northeim
Germany
TEL: +49 55515889580

SHOWROOM/OFFICE ITALY

Via Giuseppe Giusti 10,
20068 Peschiera Borromeo - MI
Italy
TEL: +39 3351295904

newline-interactive.com/eu/ / info_eu@newline-interactive.com

Contact Support: support_eu@newline-interactive.com / Technical Support Hotline: +34 91 804 31 79